



BEST COST • .502 INCH BORE • STOCK DELIVERY

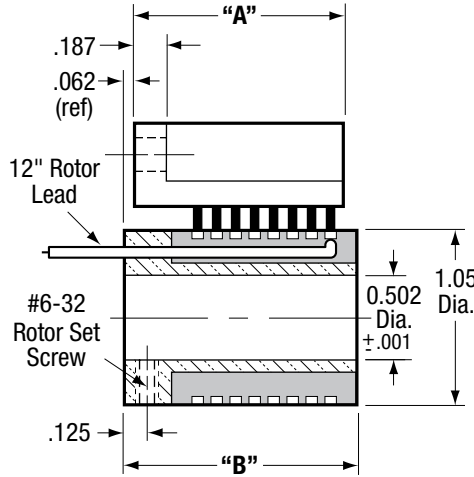


TYPE	No. of Rings	Length "A" Inches	Length "B" Inches
0902	2	.75	.88
0903	3		
0904	4		
0906	6	.99	1.12
0908	8	1.23	1.36
09010	10	1.47	1.60
09012	12	1.71	1.84
09014	14	1.95	2.08
09016	16	2.19	2.32
09020	20	2.67	2.80
09024	24	3.15	3.28

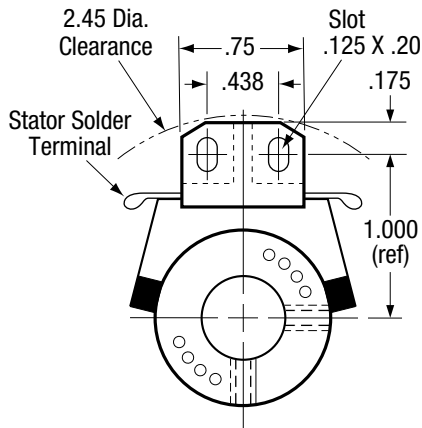

TYPE 0908

P/N 0908-4BR-FAG180 pictured.

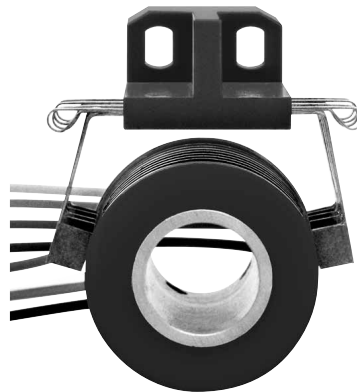

TYPE 0908

P/N 0908-2BR-FAG180 pictured.

CHARACTERISTICS

CURRENT: • 5 amp standard.
• 10 amp optional.

VOLTAGE: • Up to 60 volts standard.
• Up to 1000 volts optional.
(easily modified by increased ring to ring spacing upon request)

RINGS: • Solid Coin Silver Rings.

BRUSHES: • Silver Graphite.
• Fabricast Grade FAG 180 (80% Ag - 20% C).
• 5 amp capacity with 2 brushes per ring (1 brush block).
• 10 amp capacity with 4 brushes per ring (2 brush blocks).
• Brush complement molded as unit with diallyl phthalate dielectric.

NOISE: • 10 Milliohms maximum dynamic resistance with 2 brushes per ring.
• 5 Milliohms maximum dynamic resistance with 4 brushes per ring.

HI-POT: • 1000 VAC for 15 seconds.

ROTOR: • One piece aluminum sleeve.
• Ring complement molded as unit with diallyl phthalate dielectric.

ROTOR LEADS: • 5 amp leads - 20 AWG per MIL-W-16878 Type "E".
• 10 amp leads - 16 AWG per MIL-W-16878 Type "E".

OPTIONS: • 10 amp current carrying capacity.
• Hard vacuum compatible.
• Consult Fabricast for all available options.
* • Consult Fabricast for optional brush grades and characteristics (see page 14).

COMPLETE ASSEMBLY PART NUMBER CODING - Specify fully when ordering:

Type	Number of Brushes per Ring	Brush Grade Number	Options (If Applicable)
X	X	X	X
	(2BR or 4BR)	*(FAG180)	(10 amp, Vacuum, etc.)

For additional ordering information see page 11.

For Mounting and Wiring Methods, RPM Range, and Operating Environment see pages 9 & 10.

Fabricast, Inc.® MANUFACTURER OF SLIP RING ASSEMBLIES

TELEPHONE: (626) 443-3247
FAX: (626) 443-5594
E-MAIL: info@fabricast.com
WEB SITE: www.fabricast.com